

Providence Users



Larry Carlton



Steve Lukather
(TOTO)



Michael Landau



Matt Schofield



Guthrie Govan
(ex. Asia)



Rob Harris
(Jamiroquai)



Dave Kilminster
(ex. Roger Waters and his band/Qango)



Carl Verheyen
(Supertramp)



Gus G.
(Ozzy Osbourne)



Michael Amott
(Arch Enemy)



Lance Konnerth
(Sheryl Crow)



Yogi Lonich
(w/ Chris Cornell)

Japanese artists



PATA
(X-Japan/Ra:II)



SUGIZO



ken
(SONS OF ALL PUSSYS/L'Arc~en~Ciel)



HYDE
(VAMPS/L'Arc~en~Ciel)



K.A.Z
(VAMPS/OBLIVION DUST)



Uruha
(the GazettE)

Dealers/Distributors

North America, Central America and South America

Godlyke, Inc.

E-mail. info@godlyke.com
<http://www.godlyke.com/>

Europe

• UNITED KINGDOM

GUITAR XS

E-mail. doug@guitarXS.com
<http://www.guitarxs.com>

• ITALY

M-Tech Audio

E-mail. info@mtechaudio.it
<http://www.mtechaudio.it>

• FRANCE

Guitars Rebellion

E-mail. info.grebellion@me.com
<http://www.guitarsrebellion.com>

• BENELUX

Van de Haar Guitars and Parts

E-mail. haar.guitars@kabelfoon.nl
<http://www.haarguitars.nl>

• GERMANY

FP Service

E-mail. postjhn@aol.com
<http://www.loopersparadise.de>

• SCANDINAVIA

THESE GO TO 11

E-mail. info@thesegoto11.se
<http://www.thesegoto11.se>

Australia

bmusic

E-mail. shane@bmusic.com.au
<http://www.bmusic.com.au/>

Asia

• THAILAND

Pedals' Park

E-mail. pedals_park@yahoo.com
<http://www.pedalsparkplayground.com>

• TAIWAN

Sound Sketch Corporation

E-mail. info@soundsketch.com.tw
<http://www.soundsketch.com.tw>

• KOREA

Stompbox Korea

E-mail. stompbox@stompbox.co.kr
<http://www.stompbox.co.kr>

ProvidenceSM
SOUND PRODUCTS

PACIFIX, LTD.
SOUND PRODUCT & SYSTEM DESIGN

3-21-7, Tsurumi-Chuo, Tsurumi-ku, Yokohama-shi, JAPAN 230-0051
PHONE. +81-45-510-4060 FAX. +81-45-510-4061
E-mail. overseas1@pacifix-ltd.com

Platinum Link F201 model


GUITAR CABLE



The F201 model's NCW1 OFC makes it possible to produce a natural fat sound, while maintaining the original sound quality. The PROVIDENCE series, designed for heavy-duty use, features not only superior conductivity and insulation, but also the use of our exclusively-designed, high-performance plugs. The plug was design fully considering spatial factors and the insertion and pull-out of the plug is made easy.

■SPECIFICATIONS

PROVIDENCE with NCW1 OFC/ Conductor-Size : 0.75 (mm²)/ Construction : 150/0.08OFC(No./mm)/ Diameter : 1.14(mm)/ Insulation-Thickness : 1.43(mm)(±0.05mm)/ Diameter : 4.00(mm)/ Inner Jacket-Thickness : 0.25(mm)/ Diameter : 4.50(mm)/Shield-Diameter : 5.00(mm)/ Jacket-Thickness : 0.90(mm)(±0.10mm)/ Diameter : 6.80(mm)/ Maximum conductor resistance (20°C) : 23.60≥(Ω/km)/ Capacitance(1kHz) : Approx.100(pF/m)

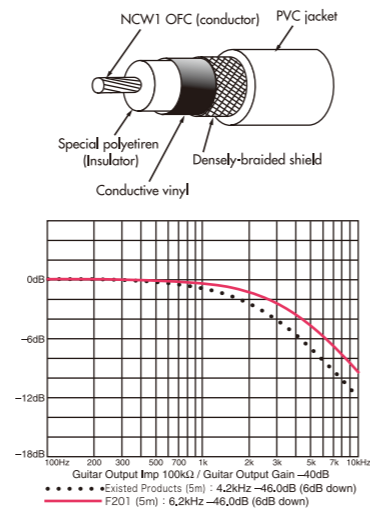

Platinum Link B202 model


GUITAR CABLE



The B202 model's NCW1 OFC LINEAR BASS'O OFC for the conductor. Mid to Low range fully supported, a feature considered difficult to accomplish for bass & guitar cables. Recommended for use with: 4-stringed electric bass (low range throughput), 5- and 6-stringed bass (wide range throughput), electric guitar (heavy gauge string & heavy sound throughput), electric acoustic guitar (wide range throughput). The longer the cables, the more insufficient sound range and throughput. Such disadvantages are minimized to extremes in the B202 model.

■SPECIFICATIONS

PROVIDENCE with LINEAR BASS'O OFC for Electric Bass & Guitar/Conductor-Size : 0.25(mm²) /Construction : 50/0.08OFC(No./mm)/ Diameter : 0.65(mm)/ Insulation-Thickness : 1.93(mm)(±0.05mm)/ Diameter : 4.50(mm)/ Inner Jacket-Thickness : 0.25(mm)/ Diameter : 5.00(mm)/ Shield-Diameter : 5.50(mm)/Jacket-Thickness : 0.75(mm)(±0.10mm)/ Diameter : 7.00(mm)/ Maximum conductor resistance (20°C) : 70.70≥(Ω/km)/ Capacitance(1kHz) : Approx.55(pF/m)

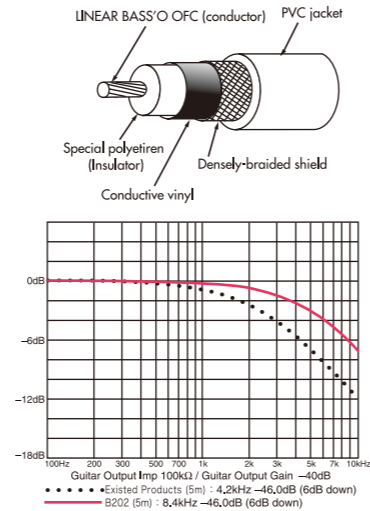

Platinum Link V206 model

The "V206 VITAL LINK" is a new cable model added to the Providence Platinum Link series that was designed to directly hook up the cable to a plug using screws. Since solder is not used at the contact points between the cable and the plug, the cable can be freely adjusted to the desired length. Both the cable and the NP-20 and NP-20L plugs were newly developed by Providence exclusively for use with the V206 cable. In addition, because the cable is fastened to the plug by these two screws, this prevents the cable and plug from accidentally separating, which is a common occurrence with conventional products of this type. The V206 cable is available in either 3-meter or 5-meter cable models. The NP-20 and NP-20L plugs are marketed separately.

■SPECIFICATIONS

PROVIDENCE with VLK1 OFC/ Conductor-Size : 0.18 (mm²) / Cons